

MICRODUCT CONNECTORS SERIES V4000 PLUS

Passive connectors
for telecom applications



About us

WHERE CONNECTION EXPERTISE MEETS TELECOM NETWORKS



Camozzi Technopolymers, a company of the Camozzi Group, is specialized in the injection molding of advanced technopolymers.

A close synergy between **Camozzi Technopolymers and Camozzi Automation** combines expertise in advanced technopolymers with connection know-how.

From the development of high-performance technopolymer components to their integration into FTTx networks, Camozzi Technopolymers supports customers with reliable, scalable and sustainable solutions, designed to meet the evolving demands of next-generation infrastructures.

Our Expertise in:

- **Injection molding of advanced technopolymers**
- **Selection and processing of the most suitable raw materials**
- **Customer support from feasibility to industrialization**
- **Development of reliable connection solutions for FTTx networks**
- **European supply chain with full material traceability**
- **Sustainable solutions with reduced environmental impact**



Key Products

FTTx CONNECTION SOLUTIONS

Our FTTx connection solutions are designed to meet the requirements of next-generation networks, ensuring reliability, ease of installation and long-term performance across a wide variety of deployment conditions. Developed through the combined expertise of Camozzi Technopolymers and Camozzi Automation, the range includes the **Series V4000 PLUS** and **V4000 PLUS LE**.

Key features:



Metal-free design



UV-resistant



Fast push-in connection



Entirely European supply chain

In compliance with:

- CEI EN 50411-2-8
- CEI EN 61386-24
- ISO 14067
- ASTM G154
- Reach
- RoHS

Product Certifications



V4000 PLUS LE




V4000 PLUS LE



V4000 PLUS



Designed for Direct Buried (DB) and Direct Install (DI) applications

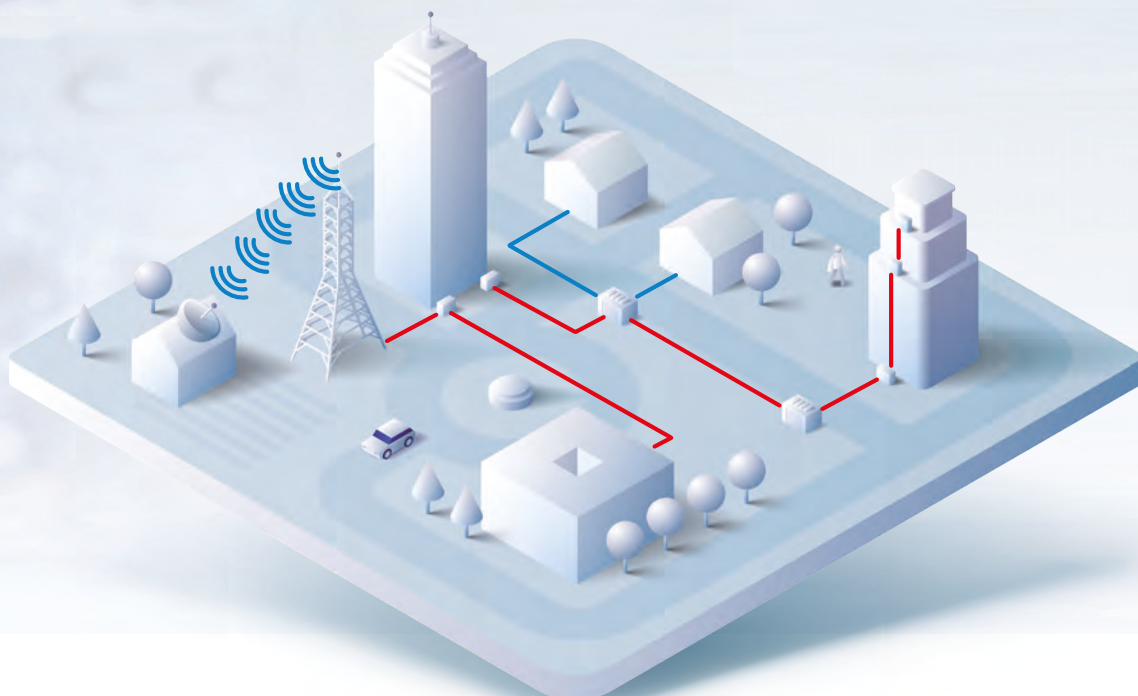

Series V4000 PLUS

MICRODUCT CONNECTORS



The **metal-free** push-in connectors of the **Series V4000 PLUS** feature a **transparent polycarbonate body** that enhances the **thermal stability** of the connector while providing exceptional **impact resistance**. Their capability to be **connected and disconnected quickly**

and effortlessly, as well as their **robust and compact design** and the use of **durable materials**, make these connectors ideal for the most demanding environments, including **Direct Install (DI)** or **Direct Buried (DB)** applications for telecommunication network deployment.

The TÜV SÜD certification

Series V4000 PLUS connectors are certified by TÜV Süd to CEI EN 50411-2-8 standards, which requires validation to compliance with the criteria listed below, including verification of the related production processes.


STANDARD **TYPE OF TEST**

EN 60794-1-2	Impact
EN 61300-2-1	Vibration (sinusoidal)
EN 61300-2-4	Microduct retention
EN 61300-2-5	Torsion/Twist
EN 61300-2-10	Crush resistance
EN 61300-2-22	Change of temperature
EN 61300-2-23	Water immersion
EN 61300-2-26	Salt mist
EN 61300-2-33	Re-entries

EN 61300-2-34	Resistance to solvents and contaminating fluids
EN 61300-2-34	Resistance to stress cracking solvents
EN 61300-2-37	Microduct bending
EN 61300-2-38	Sealing performance after test
EN 61300-2-38	Pressure loss during test
EN 61300-3-1	Visual appearance
EN 60529	Protection rating
EN 61386-24	Conduit systems buried underground

✓ Key features

- Metal-free
- UV resistant according to ASTM G154
- Suitable for use in Direct Buried (DB) applications
- High temperature resistance: -20 to +70°C

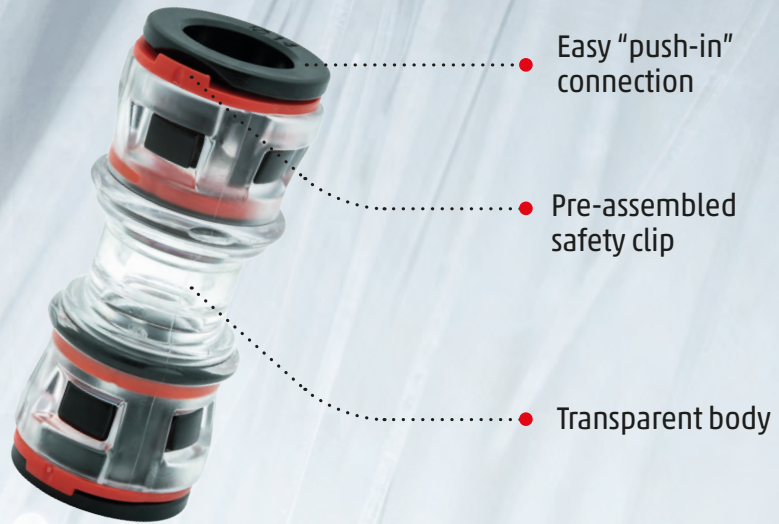

GENERAL INFORMATION		OPERATING SCHEME
• Materials	See the operating scheme 1 = Polycarbonate body 2 = NBR seal 3 = Polyacetal washer 4 = Polyacetal collet 5 = Polyacetal safety clip	
• Versions	Direct Install (DI), Direct Buried (DB), Reducing, Endstop	
• Installation and blowing temperature	from -15°C to +50°C	
• Operating temperature (after blowing)	from -20°C to +70°C	
• Maximum blowing pressure	20 bar	
• Fluid	Compressed air with blowing system	
• Microduct to connect	High-density Polyethylene (HDPE)	
• Microduct outer diameters	3, 4, 5, 7, 8, 8.5, 10, 12, 12.7, 14, 16, 18, 20 mm	
• Estimated life*	25 years	
• Standards	CEI EN 50411-2-8 CEI EN 61386-24 ASTM G154 Reach Rohs	
• Patent	Connectors patent	
• Protection rating	IP68	

• Direct Buried (DB) Use	CV4580 - CV4581 - CV4582 - CV4750 models can be used in direct buried installations. We do not recommend burying thin microduct which can fail in DB conditions, even though the connector will continue to perform correctly.
• Warning	Not to be used in sealed closures without an overpressure safety system.
• Conflict of Substances	No liquids may be introduced into the infrastructure except for water-based lubricants specifically designed for optical fibers and compatible with polycarbonate.
• Storage Conditions	Store in a dry environment, in the absence of dirt and dust, away from direct sunlight and heat sources.

* The Products have been tested in order to simulate a 25 years lifetime.

Series V4000 PLUS


TECHNICAL DATA



Straight Connector Mod. CV4580 PLUS

Connector DI (Direct Install)
Also suitable for DB (Direct Buried) use


DIMENSIONS						
Mod.	A	B	F	L	Weight (g)	Package (pieces)
CV4580 PLUS 3/2,1	3	2.1	10	30	2	100
CV4580 PLUS 4/2,1	4	2.1	10	30	2	100
CV4580 PLUS 5/3,5	5	3.5	12.5	39	4	100
CV4580 PLUS 8/6	8	6	17.5	43	7	100
CV4580 PLUS 8,5/6	8.5	6	17.5	43	7	100
CV4580 PLUS 10/8	10	8	20.5	48	9	100
CV4580 PLUS 12/10	12	10	23	52	12	100
CV4580 PLUS 12,7/10	12.7	10	23	52	12	100
CV4580 PLUS 14/12	14	12	25.5	59	16	100

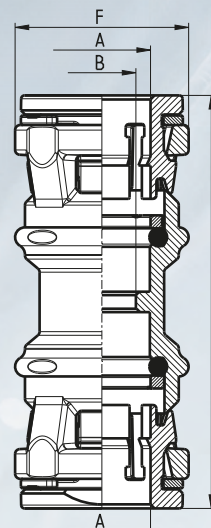

Straight Connector Mod. CV4581 PLUS

Connector DB (Direct Buried)
Also suitable for DI (Direct Install) use

DIMENSIONS						
Mod.	A	B	F	L	Weight (g)	Package (pieces)
CV4581 PLUS 7/3,5	7	3.5	16.5	41.5	6.5	100
CV4581 PLUS 7/4	7	4	16.5	41.5	6.5	100
CV4581 PLUS 8/4	8	4	17.5	43	7.5	100
CV4581 PLUS 8/5	8	5	17.5	43	7.5	100
CV4581 PLUS 10/6	10	6	20.5	48	10	100
CV4581 PLUS 10/7	10	7	20.5	48	10	100
CV4581 PLUS 12/8	12	8	23	52	12	100
CV4581 PLUS 14/10	14	10	25.5	59	16	100
CV4581 PLUS 16/10	16	10	30	66	26	50
CV4581 PLUS 16/12	16	12	30	66	26	50
CV4581 PLUS 16/13	16	13	30	66	26	50
CV4581 PLUS 18/12	18	12	33.5	77	37	50
CV4581 PLUS 18/14	18	14	33.5	77	37	50
CV4581 PLUS 20/15	20	15	37.5	81.5	45	50
CV4581 PLUS 20/16	20	16	37.5	81.5	45	50

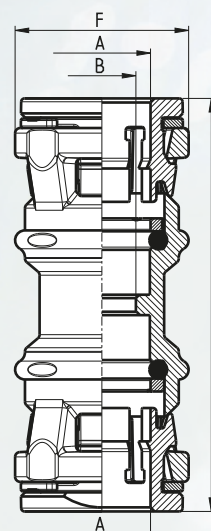




Reducing Connector Mod. CV4582 PLUS

Reducing Connector DI (Direct Install)
and DB (Direct Buried)

DIMENSIONS

Mod.	A	B	F	A1	B1	F1	L	Weight (g)	Package (pieces)
CV4582 PLUS 5/3,5-3/2,1	5	3,5	16,5	3	2,1	10	35	4	100
CV4582 PLUS 7/4-4/2,1	7	4	16,5	4	2,1	10	37	4	100
CV4582 PLUS 7-5/3,5	7	3,5	16,5	5	3,5	12,5	40	4,5	100
CV4582 PLUS 7/4-5/3,5	7	4	16,5	5	3,5	12,5	40	4,5	100
CV4582 PLUS 10/6-7/4	10	6	20,5	7	4	16,5	44,5	6	100
CV4582 PLUS 10-7/5,5	10	5,5	20,5	7	5,5	16,5	44,5	6	100
CV4582 PLUS 12-10/8	12	8	23	10	8	20,5	50	10	100
CV4582 PLUS 14-12/10	14	10	25,5	12	10	23	55,5	14	100
CV4582 PLUS 16/12-14/10	16	12	30	14	10	25,5	55,5	15	50
CV4582 PLUS 20/15-14/10	20	15	37,5	14	10	25,5	74	25	50
CV4582 PLUS 20/16-14/10	20	16	37,5	14	10	25,5	74	25	50

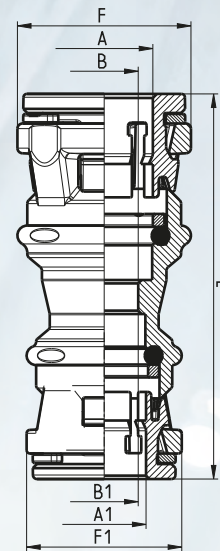


Endstop Connector Mod. CV4750 PLUS

Endstop Connector DI (Direct Install)
and DB (Direct Buried)

DIMENSIONS

Mod.	A	F	L	Weight (g)	Package (pieces)
CV4750 PLUS 3	3	10	16,5	1,5	100
CV4750 PLUS 4	4	10	16,5	1,5	100
CV4750 PLUS 5	5	12,5	21,5	2,5	100
CV4750 PLUS 7	7	16,5	22,5	3,5	100
CV4750 PLUS 8	8	17,5	23,5	3,5	100
CV4750 PLUS 8,5	8,5	17,5	23,5	3,5	100
CV4750 PLUS 10	10	20,5	26	5	100
CV4750 PLUS 12	12	23	28	7	100
CV4750 PLUS 12,7	12,7	23	28	7	100
CV4750 PLUS 14	14	25,5	32,5	9	100
CV4750 PLUS 16	16	30	36	13,5	50
CV4750 PLUS 18	18	33,5	42	19	50
CV4750 PLUS 20	20	37,5	45,5	25	50



Series V4000 PLUS ACCESSORIES





Protection Cap Mod. 4708

The **PROTECTION CAP** for Direct Buried (DB) applications can be inserted on the connector to protect it from water, dirt, dust, and other debris (soil, stones, sand, etc...)

Material: thermoplastic rubber

Colour: black



DIMENSIONS

Mod.	A	F	L	Weight (g)	Package (pieces)
4708 5	5	14.5	23.5	1.5	25
4708 7	7	18	25	2	25
4708 8	8	19	25.5	2	25
4708 10	10	21.5	28	3	25
4708 12	12	24	29.5	4	25
4708 14	14	26.6	33.2	5	25
4708 15	15	28.4	34	5	25
4708 16	16	31	37	6	25



Tube Cutter Mod. PNZ

CHARACTERISTICS

Mod.	Package (pieces)
PNZ-12	for tubes Ø up to 12 mm 1
PNZ-25	for tubes Ø up to 25 mm 1



Microducts Cutter Mod. PNZP

CHARACTERISTICS

Mod.	Package (pieces)
PNZP-12	for tubes Ø up to 12 mm 1

Series V4000 PLUS



INSTALLATION GUIDELINES

1 Preparing the microduct to be connected

Take the microduct, clean it, **check its right dimension and ovality**.

Cut the microduct with a Camozzi Automation's tube cutter at an **angle of 90°** ($\pm 3^\circ$) and remove any burrs by trimming the edges of the microduct with a bevel tool.

AVOID: Do not use any other tools to cut the microduct.

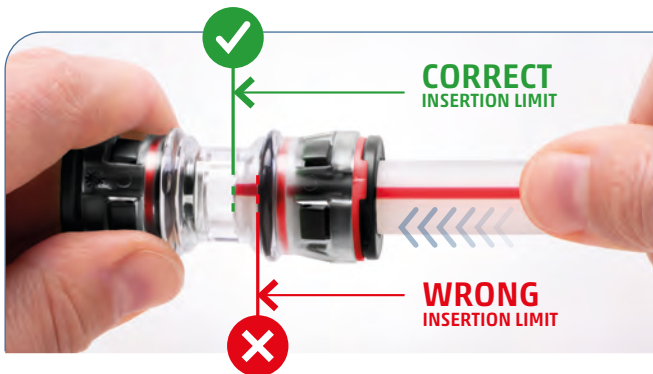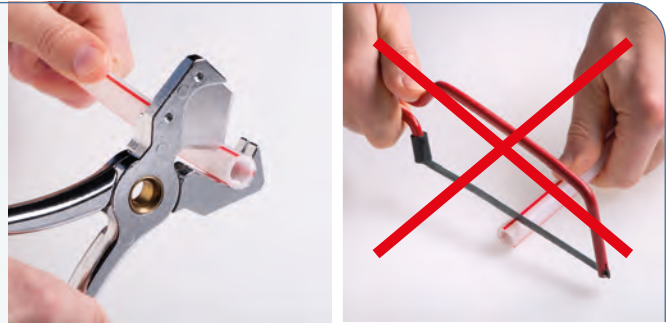

2 Installing the connector

With the microduct properly prepared, **insert the connector fully up to the insertion limit** ensuring that the tube reaches the stopping point (removal of safety clip is not required), which indicates the correct position for the microduct in the connector.

AVOID: During the connection operation, do not twist the connector.

3 Releasing the connector

Make sure the system is depressurised before removing the microduct from the connector.


Remove the safety clip and press the collet towards the inside of the connector.

The microduct can be pulled out along the installation axis.

If all operations are carried out manually, without the use of any other tool, and the correct procedure is followed, the connector can be released and installed up to 5 times.

AVOID: During the disconnection operation, do not twist either the microduct or the connector.

In case of twist, do not use the same connector for new installations or reinstallations.

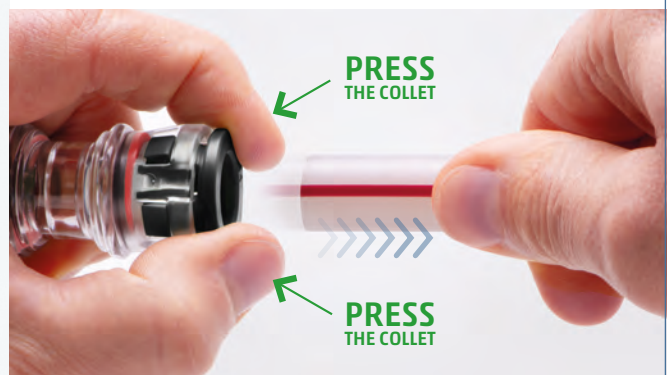

4 Position of the connector in the infrastructure

Straight connectors and reducing connectors are designed to work parallel to the axis of installation of the connected microducts. For this reason, it is necessary to allow at least 200 mm overlap of the microduct on each side of the connector.

NOTE: Although these connectors can be direct buried, we recommend adding a protective cap before the microducts are inserted.

5 Reinstalling the connector

To reinstall the connector on the infrastructure please refer to point 1 and point 4.

NOTE: If disconnecting the tube is difficult due to the presence of debris in the coupling/release system, we recommend using a protective cap for any future maintenance on the system.

D I S C O V E R M O R E

Turning green

CAMOZZI TECHNOPOLYMERS ACHIEVES ISO 14067

Camozzi Technopolymers has undertaken a **Life Cycle Assessment (LCA)** of the connectors **Series V4000 PLUS LE**, one of the company's core products. LCA is a methodology used to evaluate the overall environmental impact of a product or service by considering all phases of its life cycle, from raw materials acquisition (cradle) to exit from the production facility (gate). This makes it possible to calculate the **Carbon Footprint (CFP)** of these connectors **in accordance with ISO 14067 standards** (and ISO 14040 and 14044, which are the reference points for an LCA analysis).

Due to the company's organizational structure and its expertise in **Environmental Social and Governance (ESG)**, it has also been possible to adopt the systematic application of ISO 14067 to enable the autonomous calculation of the **Carbon Footprint of the product (CFP)**. All activities, procedures and documentation issued in **compliance with ISO 14067** have been **certified by DNV**, which conducted a critical review of the study report, the procedures implemented by the company, the accuracy of the data, the adoption of correct methodologies, the conformity to guidelines and transparency in communication with stakeholders.



Strategic assets for the company's GREEN EVOLUTION:

- 20 • Electric injection molding machines
- 100% • Green energy
- 12 • New robots to automate the process
- 70% • Power consumption of the new injection molding machines

Camozzi Technopolymers Life Cycle Assessment perimeter: from cradle to gate





Up to
-84%

CO₂ emissions
compared to
Series V4000 PLUS



New low emission passive connector

SERIES V4000 PLUS LE DESIGNED TO BE SUSTAINABLE

A close synergy with Camozzi Automation has allowed Camozzi Technopolymers to develop the **new Series V4000 PLUS LE** - the **latest generation of low emission connectors created using sustainable raw materials**.

These new, transparent, metal-free push-in connectors are the perfect solution for blown fibre applications.

With a **full technopolymer design, unrivalled impact resistance, and fast and reliable microduct connection** the new Series V4000 PLUS LE makes the ideal solution for your infrastructure deployment.



BIO-circular
raw materials



Lower CO₂
emissions
compared to
Series V4000 PLUS



Metal-free



**Made
in Europe**

Find out the new catalogue
Series V4000 PLUS LE





Technopolymers

A Camozzi Group Company

camozzitechnopolymers.com



Scan the QR CODE
to download catalogue
and certifications

Contacts

Camozzi Technopolymers S.r.l.
Società Unipersonale

REGISTERED OFFICE
Via R. Rubattino, 81
20134 Milano
Italy

OPERATIONAL HEADQUARTERS
Via XXV Aprile, 5
25080 Castrezzone di Muscoline (BS)
Italy
Tel. +39 0365 32128

Customer Service
fttx@camozzi.com

COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV
ISO 9001 • ISO 13485

© Copyright Camozzi Technopolymers Srl - 2025

All data and information contained in the present catalogue (including, by way of example, text, photos, images, designs, trademarks, icons) are subject to national and international copyright and intellectual property laws.

